SPECIFICATION & PRICELIST

Dehler 38 SQ

TECHNICAL DATA	
LOA	12.07 m / 39' 7"
HULL LENGTH	11.30 m / 37' 1"
LWL	10.40 m / 34' 1"
BEAM	3.75 m / 12' 4"
DRAUGHT	
standard	2.03 m / 6' 8"
competition	2.24 m / 7' 5"
shallow keel	1.60 m / 5' 3"
BALLAST	
standard	2.38 t / 5,247 lbs
competition	2.05 t / 4,508 lbs
shallow keel	2.75 t / 6,062 lbs
DISPLACEMENT	
standard	7.50 t / 16,534 lbs
competition	7.00 t / 15,432 lbs
shallow keel	7.60 t / 16,755 lbs
ENGINE APPROX.	Diesel 29 PS / hp
FRESH WATER	approx. 295 l / 77.93 gal
FUEL TANK	approx. 160 l / 42.27 gal
MAST ABOVE WL	
standard & alu	17.70 m / 58' 1''
carbon	17.80 m / 58' 5''
TOTAL SAIL AREA	
standard	77.90 m² / 839 sq ft
competition alu	84.50 m² / 910 sq ft
competition carbon	85.25 m² / 918 sq ft
MAIN SAIL	
standard	42.80 m² / 461 sq ft
competition alu	49.40 m² / 532 sq ft
competition carbon	49.34 m² / 531 sq ft
JIB	
standard	35.10 m² / 378 sq ft
competition alu	35.10 m² / 378 sq ft
competition carbon	35.91 m² / 387 sq ft
SPINNAKER	
competition	101.70 m² / 1,095 sq ft
GENNAKER	
standard	103.70 m² / 1,116 sq ft
competition	121.00 m² / 1,302 sq ft
FREERIDE	82.10 m² / 884 sq ft
RIG	
standard	I 15.07 m / 49' 5''
	J 4.36 m / 14' 4"
	P 14.50 m / 47' 7"
	E 5.20 m / 17' 1"
CE CERTIFICATE	A - 6
DESIGN	judel/vrolijk & co.
INTERIOR	Dehler

All measurements/figures are approximate. Errors and omissions excepted. Specification and material can be changed without notice. Valid from 2021.07.01.

DECK AND INTERIOR LAYOUTS

Dehler 38 SQ

DECK LAYOUT

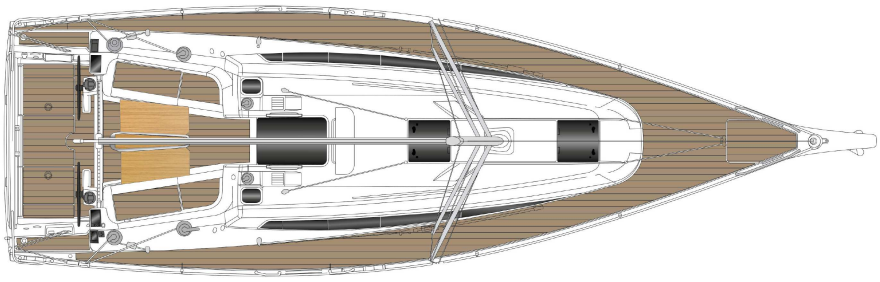

INTERIOR LAYOUT

STANDARD

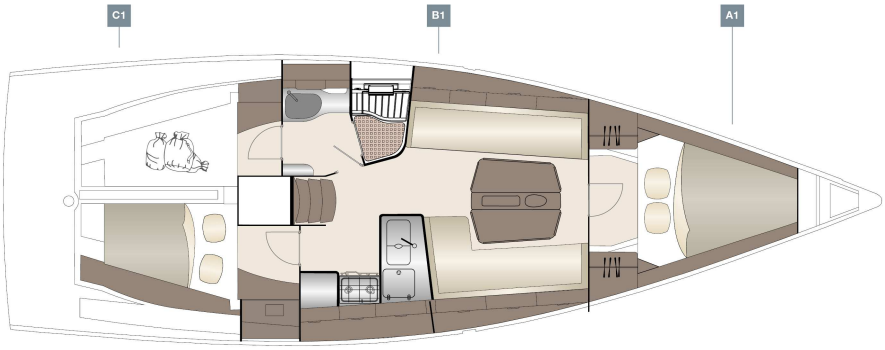

OPTION

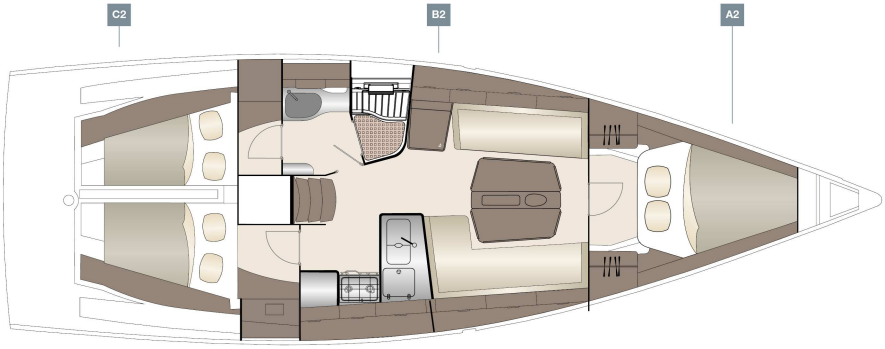

OPTION

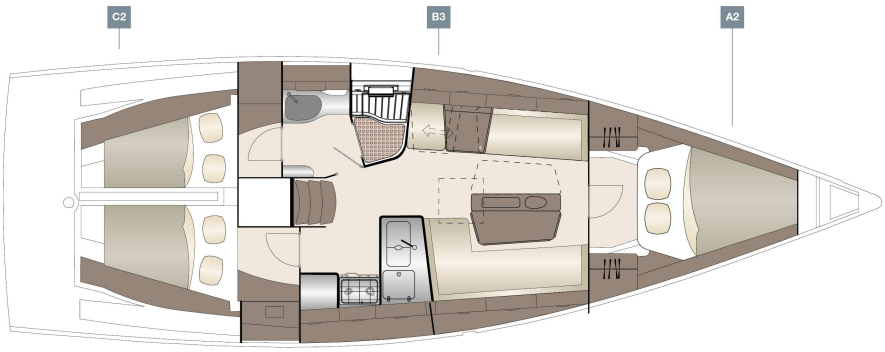

STANDARD SPECIFICATION

Dehler 38 SQ

HULL
- 6 hull windows (3 each side)
- GRP hull, isophthalic gelcoat, colour Signal White (RAL 9003), 1st layer vinyl ester resin and balsa sandwich laminat
- Waterline and cove line, isophthalic gelcoat, colour: Dark Blue (RAL 5004)

KEEL
- L-keel, cast iron, standard draft: 2.03 m
- GRP rudder with sea-water resistant aluminium shaft and selfaligning bearings

LAYOUT & INTERIOR
- A1: Master cabin with double V-berth, hanging locker and shelves
- B1: Saloon with L-galley, dining area on stb and long sofa on port - separate head on port with "Dehler Uni Door System" to shower stall
- C1: Aft cabin with double berth, locker and storage on stb, large storage space on port with entrance from head
- 2-burner gas stove, waste bin, 12 V fridge approx. 130 l, double stainless steel sink with mixing tab
- Interior furniture in high quality marine plywood, satin varnish
- Dehler companionway closing system
- Saloon table, folding with stowage
- Worktop in galley, Off White
- SLS - Scenario light system touch screen controller with dimmer for saloon

WOOD (FURNITURE, FLOORBOARD)
- Furniture - Mahogany
- Floorboard - Australian Acacia

UPHOLSTERY
- Mattrasses for all berths
- Upholstery - Baltic, colour: creme
- Upholstery Piping (colour selection)

DECK & OUTSIDE EQUIPMENT
- GRP deck with antslip surface, isophthalic gelcoat, coulour: Signal White (RAL 9003), 1st layer vinyl ester resin with balsa sandwich core. Cockpit locker on port, stern locker on port and stb, anchor locker at bow.
- Teak on cockpit benches
- Twin wheel steering system with emergency tiller
- 2 stainless steel steering wheels with leather cover
- Pulpit and pushpit, stainless steel
- Railing, incl. stanchions and stainless steel wire
- Halyards and control lines with organizers and jammers on coachroof, 4 retractable mooring cleats, handrail on coach roof
- 2 LEWMAR 40 Race manual halyard winches
- 2 LEWMAR 45 Race manual secondary winches
- 2 LEWMAR 40 Race manual mainsheet winches
- Swimming ladder
- Rub rail, aluminium
- Helmsman footrests, foldable
- Composite bowsprit with integrated anchor fitting
- Genoa tracks, incl. cars adjustable from cockpit
- German mainsheeet system with adjustable traveller
- 4 deck hatches - openable, anchor locker hatch
- 6 deck coach roof windows - openable

RIG & SAILS
- Rig, anodized aluminium, keel stepped incl.: dyform rigging, running rigging, kicker, manual jib furler, "Dehler Quick Reefing System", manual backstay tensioner
- QUANTUM AC5 performance sails - full battened, triradial, main and jib

NAVIGATION & INSTRUMENTS
- 2 illuminated compasses at steering pedestal
- Navigation lights - LED

PROPULSION
- Fuel tank, approx. 160 l
- Engine (Diesel, approx. 29 hp) - saildrive, 2 blade folding propeller

EQUIPMENT
- 12 V and 230 V electric system with main panel, 12 V and 230 V socket and 230 V shore power.
- AGM battery set - capacity: Starter battery: 1 x 90 Ah, service battery: 1 x 160 Ah
- Country Version: EU / AUS
- Battery charger 35 A
- Manual toilet with sea water flush
- Shower unit in cockpit, warm-/coldwater
- LPG gas system, stowage for 1 bottle
- Manual and electric bilge pump
- Blackwater system (appr. 35 l) with deck extraction and seacock for head
- Fresh water system with electric pump and 20 l hotwater, heated also by main engine
- Fresh water tank, appr. 295 l

SHIPPING & TRANSPORT
- CE - Certificate cat. A - 6 / B - 10 / C - 14
- Owners manual
- EC - Type Examination Certificate